

# NUMERICAL MODELING OF INTERNAL VOIDS IN FIRE EXPOSED STRUCTURES

Elza Maria Morais Fonseca<sup>1</sup> Carlos Alberto Magalhães de Oliveira<sup>2</sup>

**Key words:** Internal Void, Temperature, Finite Elements, Eurocodes, Heat Transfer, Fire with Standard temperature-time curve ISO 834

The study of steel structures at elevated temperatures needs the characterisation of the thermal action and the material thermal properties variation with temperature as well as the thermal conduction problem solution in a domain with well know boundary conditions.

Structures may have internal voids (figure 1) filled with air (hollow columns, profile sections thermally insulated, steel pipes,...). In the presence of internal voids, the internal air temperature will be determined with some simplified formulas deduced from heat transfer equations<sup>[1,2]</sup>.

A finite element code has been developed for the three and two-dimensional thermal analysis, as well as an interface element for boundary conditions modelling<sup>[3-5]</sup>. The transient temperature evolution in structures submitted to fire action and the internal temperature in the voids will be calculated.

Heat conduction is assumed for heat transfer (equation 1).

A finite element formulation for heat conduction is presented, giving particular attention to the non-linear material problem.

The equation 2 makes it possible for the temperature determination inside the void.

The hypothesis used in this method is that the specific heat of the air is so small that it can be neglected<sup>[1]</sup>. Then, at any time, the fictitious temperature inside void will be considered uniform, determined by the heat convective and radiative fluxes received from all the elements surrounding that region.

Conclusions about the importance of this modelling will be discussed.

The results of a two-dimensional case will be compared with the numerical code Safir<sup>[1]</sup>. A three dimensional internal void formulation has been developed, and the same case study has been compared.

$$\frac{\partial}{\partial x} \left( \lambda \frac{\partial \theta}{\partial x} \right) + \frac{\partial}{\partial y} \left( \lambda \frac{\partial \theta}{\partial y} \right) + \frac{\partial}{\partial z} \left( \lambda \frac{\partial \theta}{\partial z} \right) + \dot{Q} = \rho c_p \frac{\partial \theta}{\partial t} \quad (1)$$

$$\theta_v = \frac{\sum_{i=1}^{N_{FR}} \theta_{N_i} L_{N_i}}{\sum_{i=1}^{N_{FR}} L_{E_i} h_{E_i}} \equiv \frac{\sum_{i=1}^{N_{FR}} \theta_{N_i} L_{N_i}}{\sum_{i=1}^{N_{FR}} L_{N_i}} \quad [\text{K}] \quad (2)$$

<sup>1</sup> IPB - Instituto Politécnico de Bragança, ESTIG Campus de Santa Apolónia, Apartado 134, 5301-857 Bragança, Portugal, Tel.:+351-273303155 ; Fax:+351-273313051, e-mail: [efonseca@ipb.pt](mailto:efonseca@ipb.pt)

<sup>2</sup> FEUP - Faculdade de Engenharia da Universidade do Porto, DEMEGI - Rua Dr. Roberto Frias s/n, 4200-465 Porto, Portugal, Tel.:+351-225081778; Fax:+351-225081440, e-mail: [cmoliv@fe.up.pt](mailto:cmoliv@fe.up.pt)

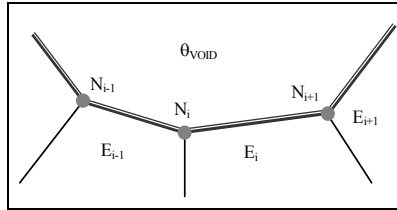


Figure 1 - Scheme of an internal void.

A steel hot-rolled profile with insulated boards will be tested. Two different situations have been considered. The first used the internal void theory and the second has considered this region as insulated. A quarter of the model has been considered due to geometry and load symmetry, (figure 2). In the figure 3 a three dimensional modelling has been presented for the same case. The results are obtained with finite element program developed, after 20 minutes of fire exposure.

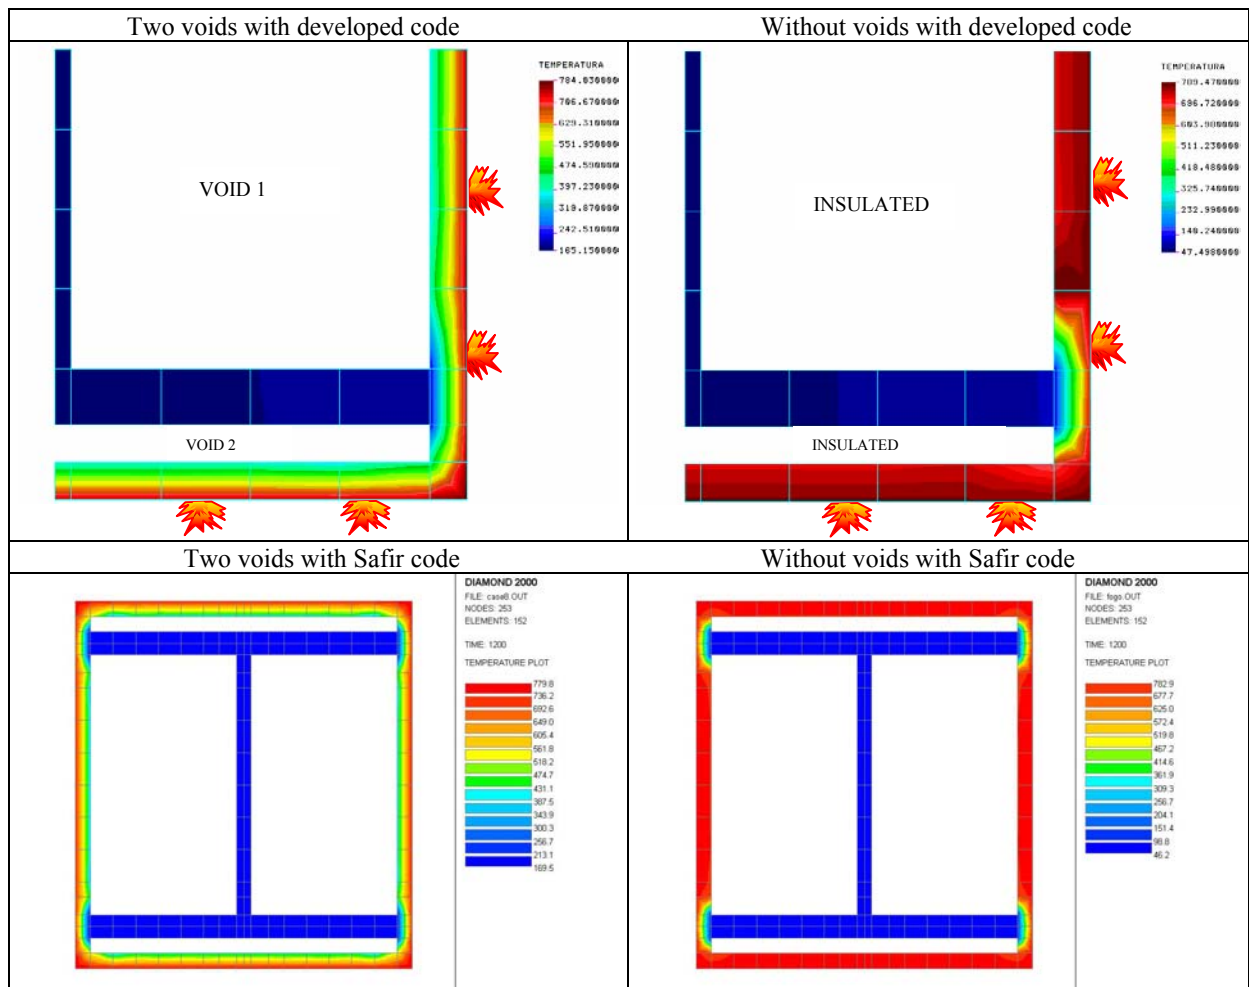


Figure 2 – Steel profile exposed to fire at four sides: two-dimensional problem.

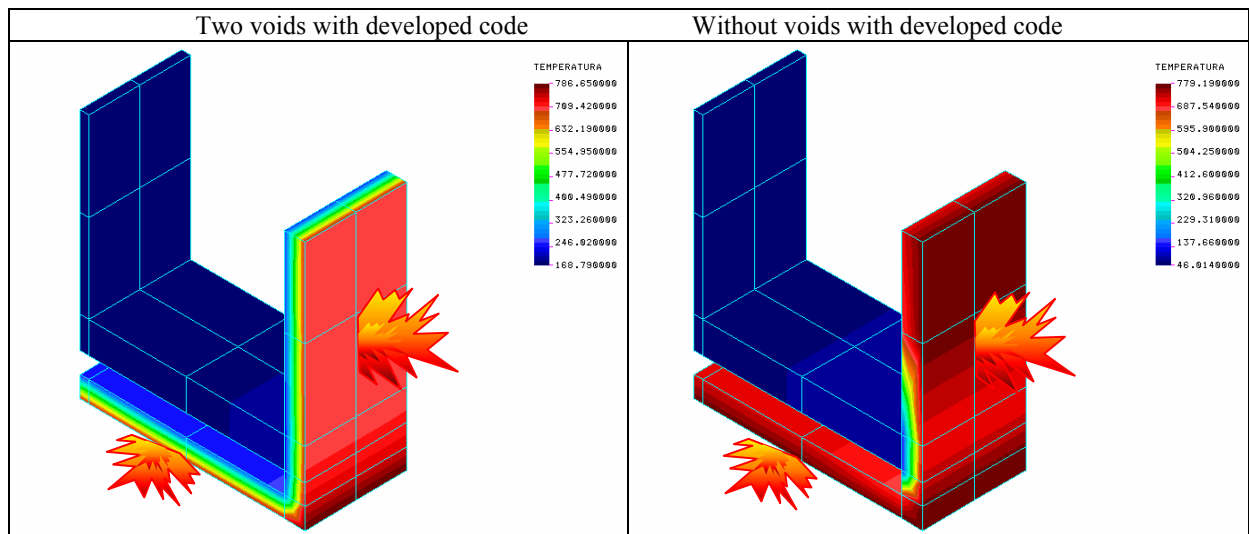


Figure 3 – Steel profile exposed to fire at four sides: three-dimensional problem.

A computational program based on the finite element method to study thermal model behaviour of steel structures exposed to high temperatures has been developed. The results obtained with the developed program have been compared with the results obtained by Safir for the two dimensional case. The three dimensional results have been obtained with the same formula implemented for higher geometric order. The modelling of internal voids is of a greater importance during the temperature evolution in a solid component in case of fire. The computing effort on meshing the internal void will be greater than the simplified formula used to model the internal void, with no advantage in temperature calculation. With this information, the designer can select the material and the profile to have an appropriate safety level or choose a thermal protection material if necessary.

#### References:

- 1 J. M. Frassen, ‘‘ Program Safir – User’s Manual’’, V1.3, University of Liège, Belgium
- 2 U. Wickström e J. Palsson, ‘‘A Scheme for Verification of Computer Codes for Calculating Temperatures in Fire Exposed Structures’’, SP Swedish National Testing and Research Institute, Fire Technology, SP Report 1999:36
- 3 H. Huang e A Usmani, ‘‘Finite Element Analysis for Heat Transfer’’, Springer-Verlag, London, 1994
- 4 EUROCODE 3, ‘‘Design of Steel Structures - Part 1-2: General Rules - Structural fire Design’’, ENV 1993 -1-2:1995.
- 5 EUROCODE 1, ‘‘Basis of Design and Actions on Structures - Part 1-2: General Rules - Structural fire Design’’, ENV 1991-2-2:1995.
- 6 R. Owen e E. Hinton, ‘‘Finite Elements In Plasticity’’, Pineridge Press Ltd., Swansea, 1984.
- 7 C. S. Krishnamoorthy, ‘‘Finite Element Analysis’’, Tata Mc Graw-Hill, 1997, Second Edition.